

PRO-VEHICLE 2-SLOT BATTERY CHARGER

FOR SEPURA STP/SC2X BATTERIES FOR SEPURA



Vehicle charger for dual Sepura STP/SC2x batteries

FEATURES & BENEFITS

- Supports both 12V & 24V systems
- Easy to install
- Velcro strap to secure the batteries during charging
- LED charging indicators

SPECIFICATION

Input Voltage	DC 12-30V
Input Current	1500mA
Charging current	Max. 800mA / Slot
Fully Charged Voltage	8.25-8.40V
Charge Mode	CC-CV
Battery chemistry supported	Li-ion, Li-polymer
Maximum Charge Time	8 hours
Over temperature protection	>45 °C
Operation Temperature	-5 ~ 45 °C (23 ~ 113 °F)
Storage Temperature	-20 ~ 60 °C (-4 ~ 140 °F)
Dimension	216.0 x 95.0 x 39.5 mm
Weight (without accessories)	~250 g

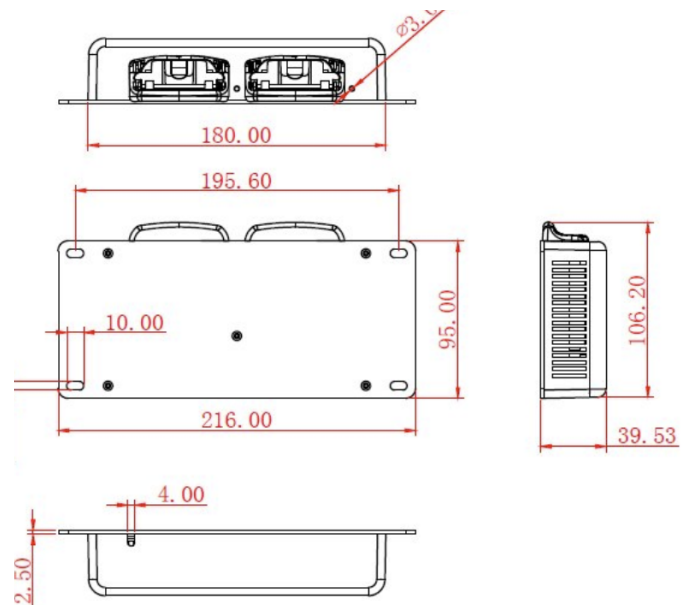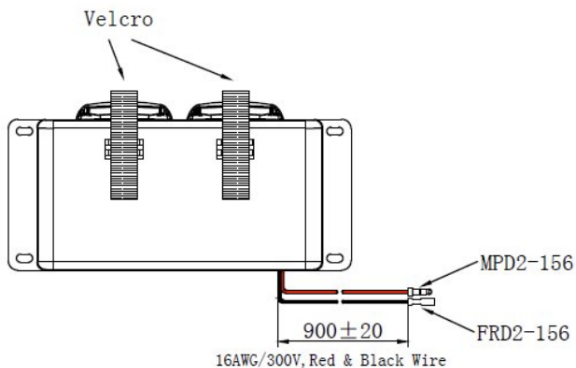

MODEL	ART.NO
ProEquip Vehicle battery 2-slot charger For Sepura STP/SC2x batteries	71265